


# Bayfield County Forestry & Parks Department

Forester: L. Neitzel, J. Holmes, A. O'Krueg			Acres: 144	Estimated Volumes			
Twp: 47N	Range: 9W	Sec: 17, 19, 20	Compartment: 107	Species	Whole Tree Ton	Roundwood Cord	Logs MBF
Township: Hughes			Stand: 23 & 45	Red Oak *	6269	1846	
Soil: loamy sand	Reforestation Code: A & C		Tract Number: 57-13	Aspen	163	53	
Topography: gently rolling			Contract Number:	Red Oak **			52

\* Approx. 96% red oak, 2% maple, 1% white birch and 1 other hardwoods.  
 \*\* Approx. 99% red oak and 1% other hardwoods.

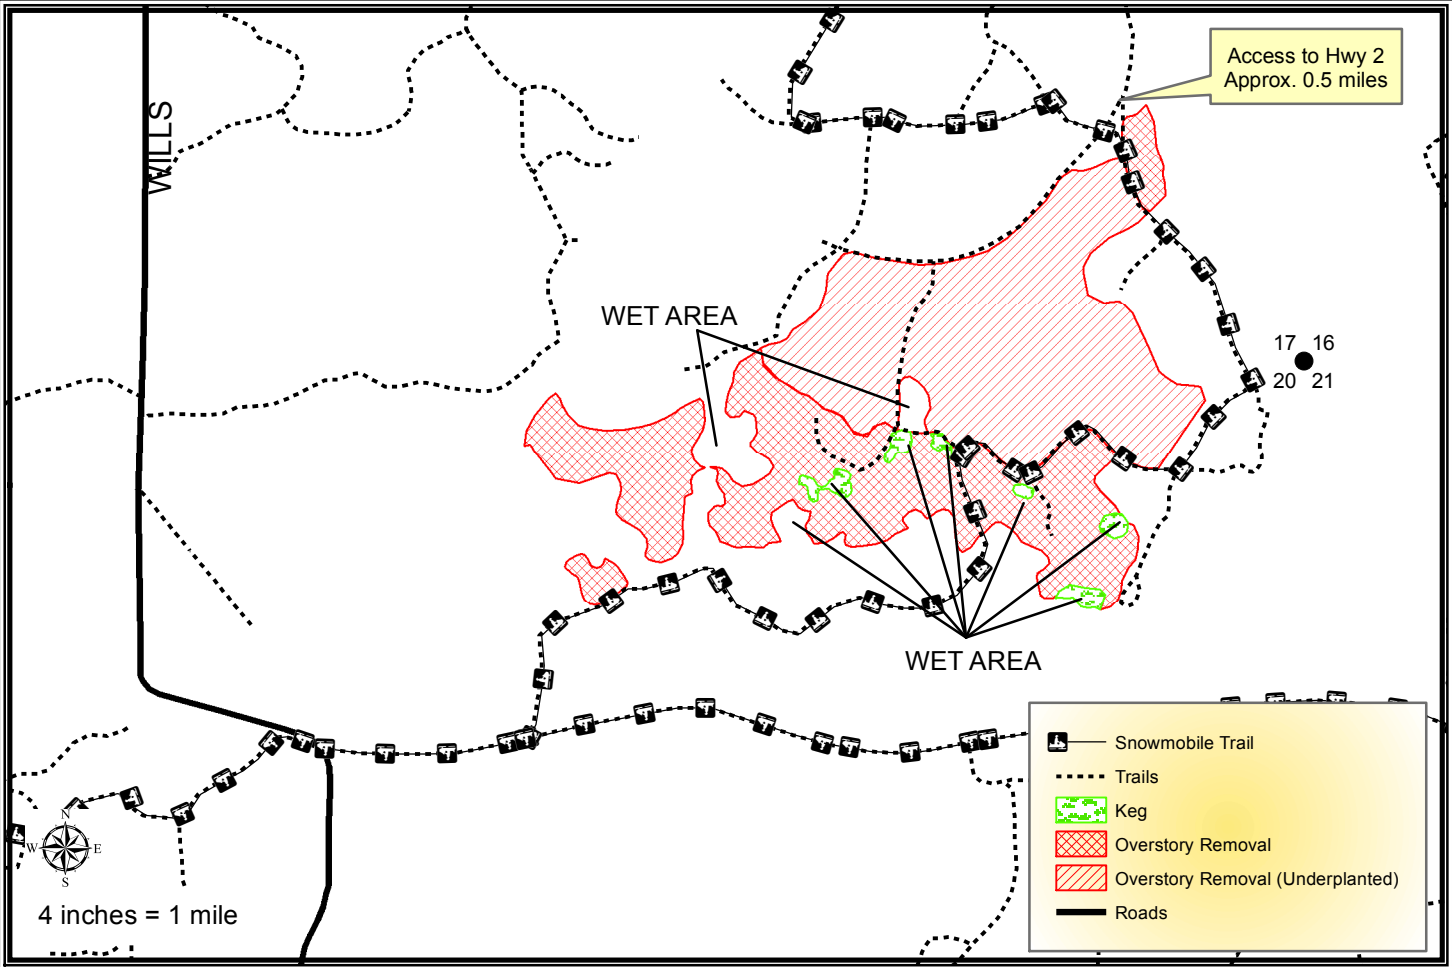

## Harvest Requirements:

- Sale is an overstory removal being sold on a Ticket Scale Basis.
- Harvest all merchantable hardwood and sever stems 2" in diameter and greater.
- Leave all purple marked trees and conifer.
- Sale is restricted to shortwood logging to protect established regeneration; however, the whole tree may be utilized. If the whole tree is utilized 1 in 10 tops less than or equal to 4" in diameter must be left scattered across the site.
- Damage to existing regeneration must be minimized.
- The sale is surrounded by young aspen. There is no painted boundary line.
- There are numerous kegs/wetlands scattered throughout the sale. The majority of them are unmapped. Leave a 30', no-cut filter strip around any wetland/keg. No equipment or felled trees are allowed in the no-cut strip.
- Do not cut snags except for those that pose a safety hazard.
- During winter harvesting the snowmobile trails must be kept unobstructed and in a packed snow condition. The purchaser must insure that harvesting and hauling operations will not create a safety hazard to snowmobiles.
- To comply with the Best Management Practices for Invasive Species: Prior to moving equipment onto or off of the sale area, scrape or brush soil and debris from exterior surfaces to the extent practical.
- Decking of wood along town roads will not be allowed without permission from Bayfield County.
- This contract requires County authorization for all road/landing construction and places a number of other requirements on road construction and closure.