


# Bayfield County Forestry & Parks Department

Forester: Amman & Neitzel			Acres: 45	Estimated Volumes			
Twp: T47N	Range: R9W	Sec: 17	Compartment: 107	<b>Species</b>	<b>Whole Tree</b>	<b>Round Wood</b>	<b>Sawlog</b>
Township: Hughes			Stand: 43,44		<b>Tons</b>	<b>Cords</b>	<b>Mbf</b>
Soil: Sand	Reforestation Code: natural	Tract Number: 46-12	Contract Number:	<b>Red Oak</b>	<b>1537*</b>	<b>456</b>	<b>83</b>
Topography: Flat				* 97% red oak, 2% maple, 1% white birch			

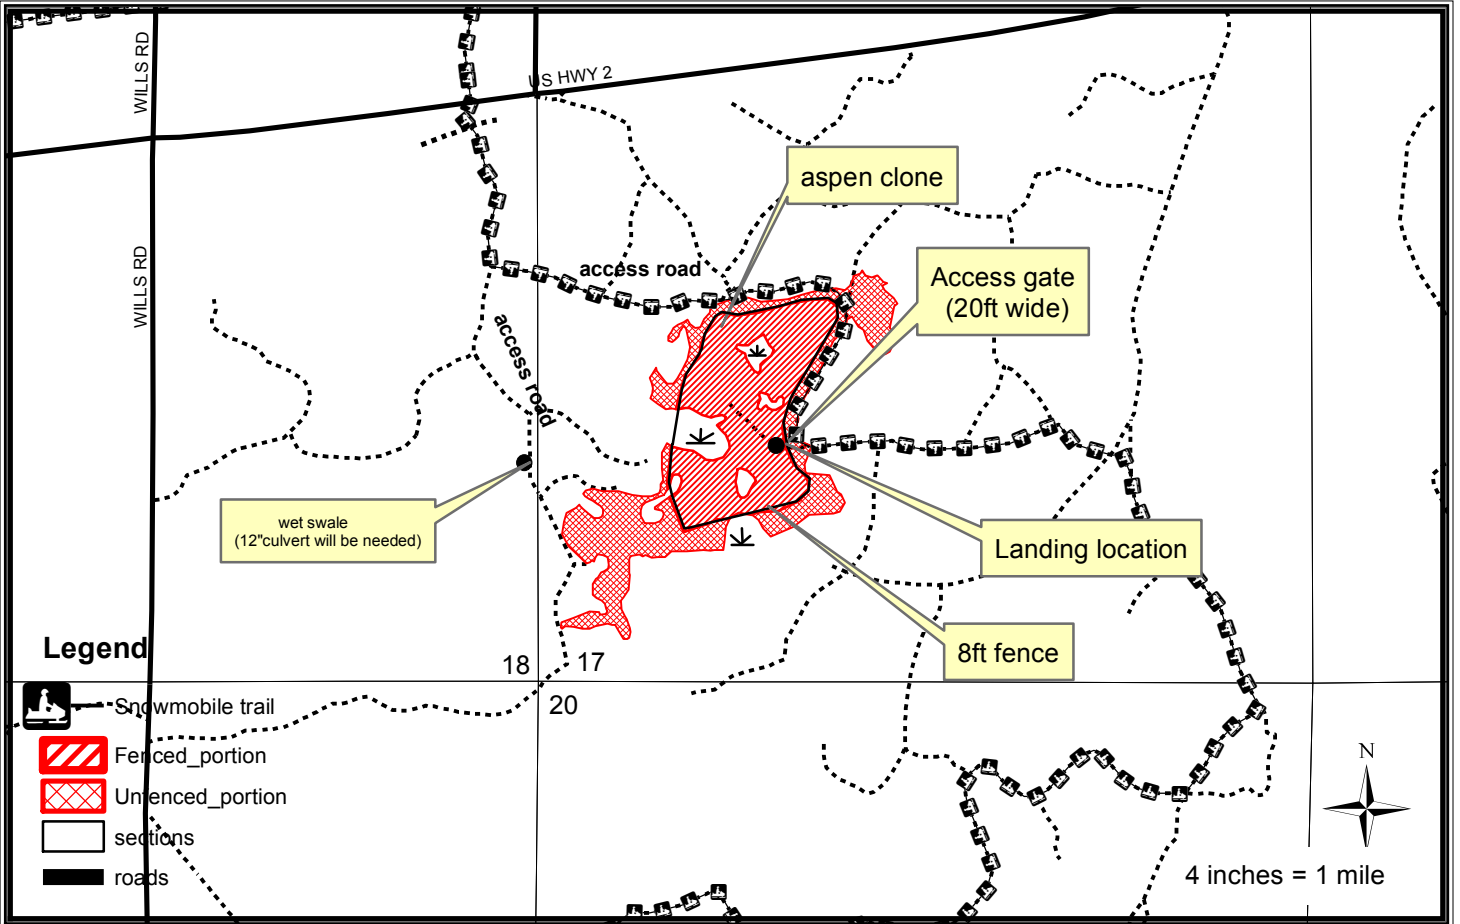

## Harvest Requirements:

- Sale is an overstory removal being sold on a Ticket Scale Basis
- Sale boundaries are marked out in red paint
- Sale has an 8ft steel fence enclosing 23 acres, while 22 acres are outside the fence. See map for details
- The access point for the timber inside the fence is the gate located on the southeast side of the fence. The gate is 20ft wide. Gate must be closed whenever a vehicle is not going through
- The landing for the wood inside the fence will be located just inside of the southern gate
- **Harvest all oak, maple, and white birch that are not marked in red paint**
- The fence is attached to a number of trees. All of these trees need to be harvested above the fence. Contractor must be able to reach above the fence (8ft) and cut the tree without damaging the fence
- Contractor is responsible for repairing any harvesting damage to the fence
- Damage to the understory regeneration must be minimized
- Do not cut any conifer, aspen, or red painted trees
- Red painted trees are boundary trees and scattered trees throughout the sale area
- There are a number of vernal ponds and wetlands within the sale area. Do not cut any trees within 30ft of vernal ponds or wetlands
- Access to this sale is on the snowmobile trail off Hwy 2
- There is a wet swale that crosses the west trail that will require at least a 12 inch culvert (see map)
- Do not cut snags except for those that pose a safety hazard.
- During winter harvesting the snowmobile trail must be kept unobstructed and in a packed snow condition. The purchaser must insure that harvesting and hauling operations will not create a safety hazard to snowmobiles
- To comply with the Best Management Practices for Invasive Species: Prior to moving equipment onto or off of the sale area, scrape or brush soil and debris from exterior surfaces to the extent practical.
- If harvest will utilize the whole tree, 1 in 10 tops must be left scattered throughout the sale.
- This contract requires County authorization for all road/landing construction and places a number of other requirements on road construction and closure.